Load 60 Kinderverdeck

(VBK0613)

Montageanleitung Handel

HINWEIS
Die Montage Load 60 Kinderverdeck darf nur von Fachpersonal durchgeführt werden.

Lieferumfang

Nr.	Benennung	Art-Nr.	Anzahl
1	Load 60 Kinderverdeck	------	1 Stück
1.1	GFK-Stangen (vormontiert)	------	2 Stück
	Anleitung Load 60 Kinderverdeck (ohne Abb.)	233352	1 Stück

Teileübersicht



Abb. 01

Load 60 Child Cover

(VBK0613)

Dealer Assembly Instructions

NOTICE
Only allow qualified personnel to assemble the Load 60 child cover.

Scope of delivery

No.	Part name	Art. no.	Number
1	Load 60 child cover	------	1x
1.1	Fibreglass rods (pre-assembled)	------	2x
	Instructions for Load 60 child cover (not shown)	233352	1x

Overview of parts



Fig. 01

Einbauraum vorbereiten

1. 2x Befestigungselemente (2) am Rahmen (3) entfernen.

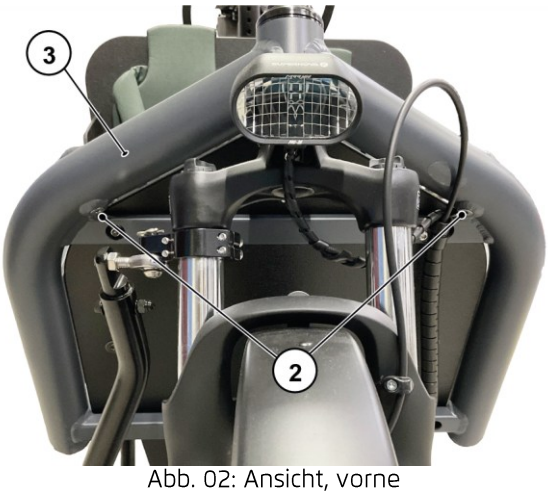

Abb. 02: Ansicht, vorne

Kinderverdeck vorne befestigen

1. Kinderverdeck (1) vorne hochklappen und 2x mit GFK-Stange (1.1) am Rahmen (3) einstecken.



Abb. 03: Ansicht, vorne

2. Kinderverdeck (1) vorne vollständig herunterklappen und 4x mit Spanngummi (4) am Befestigungspunkt (5) einhaken. Freigängigkeit der Gabel und des Lenkeinschlags muss gewährleistet sein.



Abb. 04: Ansicht, vorne

Preparing the fitting space

1. Remove 2x fasteners (2) and (3) on the frame.

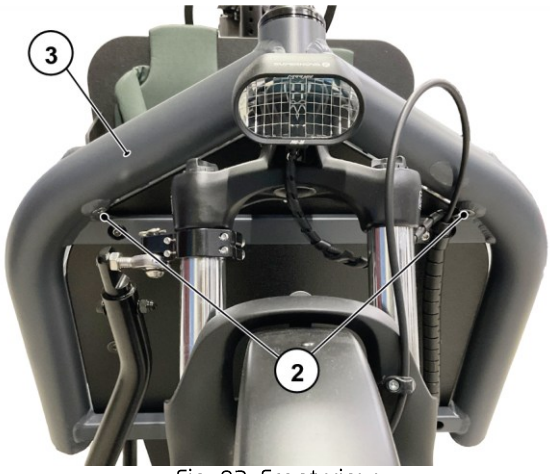

Fig. 02: Front view

Fastening the child cover at the front

1. Fold back the front of the child cover (1) and insert the 2x fibreglass rods (1.1) into the frame (3).



Fig. 03: Front view

2. Fold down the front of the child cover (1) completely and hook the 4x bungee cords (4) into the fastening point (5). Make sure that the free movement of the fork and the steering movement are not impaired.



Fig. 04: Front view

Kinderverdeck hinten befestigen

1. Kinderverdeck (1) hinten vollständig herunterklappen.
2. 2x Spanngurt (6) am Kinderverdeck (1) einfädeln und durchziehen, siehe Pfeil sowie an der Innenseite des Kinderverdecks mit Klett befestigen.
3. 2x Spanngurt (6) am Befestigungspunkt (7) einhaken.
4. 2x Spanngummi (8) am Befestigungspunkt (7) einhaken.

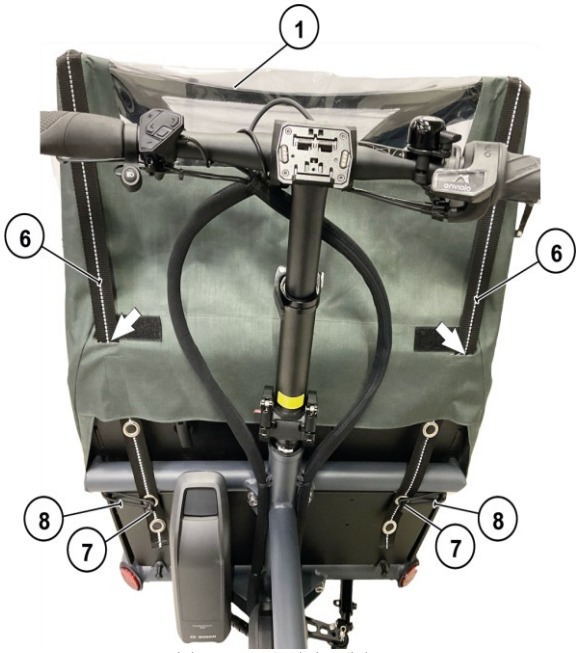

Abb. 05: Ansicht, hinten

Fastening the child cover at the rear

1. Fold down the child cover (1) completely at the rear.
2. Thread 2x lashing straps (6) through the child cover (1), pull through (see arrow), and attach to the inside of the child cover using the hook-and-loop fastener.
3. Hook 2x lashing straps (6) to the fastening point (7).
4. Hook 2x bungee cords (8) to the fastening point (7).

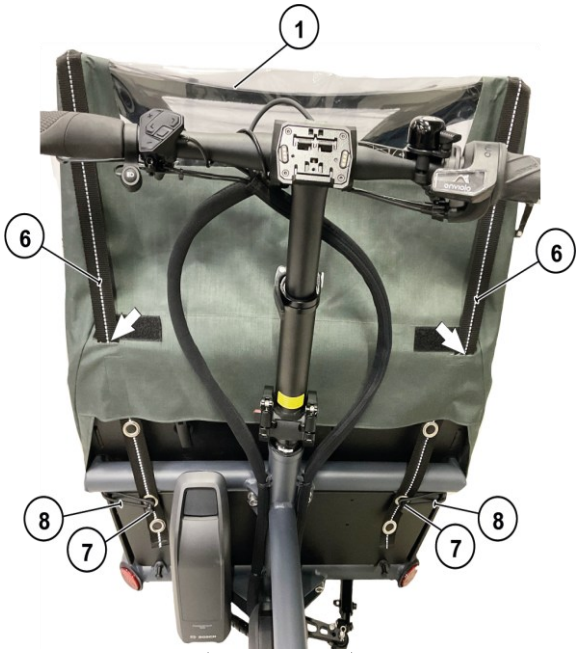

Fig. 05: Rear view